



Big Mouth

Automatic Diesel Nozzle




SPECIFICATIONS:

Body Casting:	High impact aluminum
Inlet:	1" NPT and BSPP available
Weight:	3-lbs. 2-ozs.
Spout:	Aluminum 1-1/8" OD
Poppet disc:	Viton
"O" rings:	Buna-N or Viton
Flow rate:	75 to 80 litre/min (19.5 to 21 USgpm)

FEATURES:

- Light weight
- Strong body casting resists cracking
- Automatic shut-off (Venturi type)
- Smooth lever operation and exceptional flow control
- Easy to change locknut style spout assembly

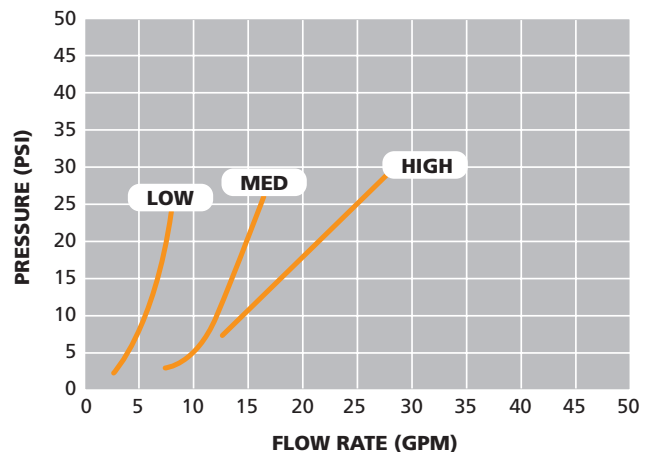

Fluid Transfer Management

www.fluidtransfer.com.au

Fluid Transfer Management

Office: Unit 1B, 11 Anvil Way, Welshpool, Western Australia 6106
Postal: PO Box 649 Belmont WA 6984
Telephone: +61 8 9458 2888 Fax: +61 8 9458 2999
Email: sales@fluidtransfer.com.au