



# Fuelmaster

## High Flow, Heavy Duty Automatic Diesel Nozzle




### SPECIFICATIONS:

Body casting:	High Strength Aluminum
Inlet:	1" NPT and BSPP available
Weight:	3.5 Lbs.
Spout:	Aluminum 1-3/16" OD
Poppet disc:	Viton
"O" Rings:	Buna or Viton
Packing:	Pure Teflon/Teflon Fiber
Metal vent tube:	More secure in spout, will not crack or be affected by blended fuels.
Flow rate:	115 to 120 litres/min (30 to 31 USgpm)

### FEATURES:

- Lighter weight
- Strong body casting resists cracking
- Automatic shut-off Venturi type
- Smooth lever operation and exceptional flow control
- Easy to change locknut style spout assembly

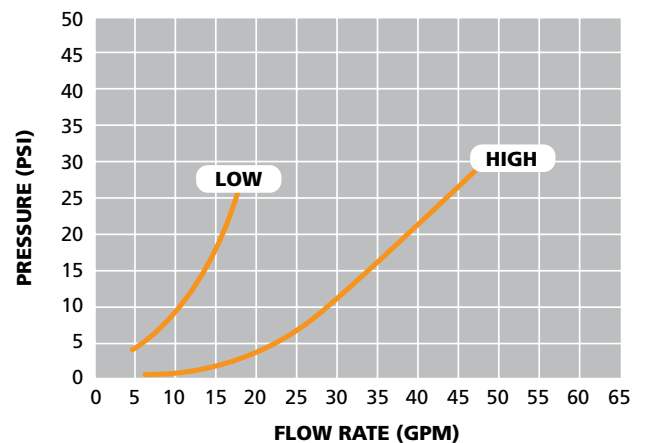

Fluid Transfer Management

[www.fluidtransfer.com.au](http://www.fluidtransfer.com.au)

### Fluid Transfer Management

Office: Unit 1, 6 Colin Jamieson Drive, Welshpool, Western Australia 6106  
Postal: PO Box 291, Welshpool WA 6986  
Telephone: +61 8 9458 2888 Fax: +61 8 9458 2999  
Email: [sales@fluidtransfer.com.au](mailto:sales@fluidtransfer.com.au)